



KEY FEATURES

Trimble R-Track™ technology for GNSS support

Advanced receiver technology and proven system design combined

Wireless technologies for flexibility and cable-free convenience

Base and rover communication options to suit any application

An important component of the Connected Site model



The Trimble® R8 GNSS System is a multi-channel, multi-frequency GNSS (Global Navigation Satellite System) receiver, antenna, and data-link radio combined in one compact unit. The Trimble R8 combines advanced receiver technology and a proven system design to provide maximum accuracy and productivity.

TRIMBLE R-TRACK TECHNOLOGY FOR COMPREHENSIVE GNSS SUPPORT

Powered by an enhanced RTK engine, Trimble R-Track technology supports both the modernized GPS L2C and L5 signals and GLONASS L1/L2 signals. The GNSS signals are capable of providing surveying professionals with real field benefits.

With the world's GNSS's in constant development, surveying businesses small and large can be confident that investment in a Trimble GNSS system is protected¹. Trimble, already proven in GPS technology, will continue to lead the industry in GNSS support.

PROVEN SYSTEM DESIGN

From the powerful Trimble field software to the receiver itself, the Trimble R8 GNSS system's overall design has been tried, tested, and proven. As a rover it is rugged, lightweight and cable free for unsurpassed ergonomics in the field. As a base it is flexible and also cable free: use the Trimble R8 as a base or rover according to each job's needs.

The Trimble R8 GNSS system's flexible communication options include:

- An internal 450 MHz radio option for use as a cable-free base station
- An internal GSM/GPRS option for Internet connectivity and use as a rover in a Trimble VRS™ network

Simply choose the Trimble R8 model that best suits your needs.

THE ORIGINAL INTEGRATED SURVEYING SOLUTION AND BEYOND

The Trimble R8 GNSS system is designed to support Trimble's original Integrated Surveying™ solution. Combine your GPS and optical data in one job file in powerful Trimble field software such as Trimble Survey Controller™. Transfer the job file seamlessly to your Trimble office software for processing.

The Trimble R8 can also be used as part of a Trimble® I.S. Rover. Simply add a prism to the rover pole and partner the Trimble R8 with a robotic optical system such as the Trimble® S6 Total Station. This integrated solution enables you to maximize the best of both surveying techniques for even greater efficiency in the field.

Whenever you're facing a new surveying challenge, your partnership with Trimble places the right tools and techniques, including GNSS technology, at your fingertips. Each Trimble system seamlessly integrates via shared workflows and technologies, making your everyday job site a place where the whole is greater than the sum of its parts: Welcome to the Connected Site.

1. In addition, Trimble research and development divisions are already working closely with Galileo satellite system teams to ensure delivery of the benefits of this new GNSS in advance of the system being operational.

TRIMBLE R8 GNSS SYSTEM

PERFORMANCE SPECIFICATIONS

Measurements

- Trimble R-Track technology
- Advanced Trimble Maxwell™ Custom Survey GNSS Chip
- High precision multiple correlator for GNSS pseudorange measurements
- Unfiltered, unsmoothed pseudorange measurements data for low noise, low multipath error, low time domain correlation and high dynamic response
- Very low noise GNSS carrier phase measurements with <1 mm precision in a 1 Hz bandwidth
- Signal-to-Noise ratios reported in dB-Hz
- Proven Trimble low elevation tracking technology
- 72 Channels:
 - GPS L1 C/A Code, L2C, L1/L2/L5¹ Full Cycle Carrier
 - GLONASS L1 C/A Code, L1 P Code, L2 P Code, L1/L2 Full Cycle Carrier
- 4 additional channels for SBAS WAAS/EGNOS support

Code differential GPS positioning²

Horizontal ±0.25 m + 1 ppm RMS
Vertical ±0.50 m + 1 ppm RMS
WAAS differential positioning accuracy³ typically <5 m 3DRMS

Static and FastStatic GPS surveying²

Horizontal ±5 mm + 0.5 ppm RMS
Vertical ±5 mm + 1 ppm RMS

Kinematic surveying²

Horizontal ±10 mm + 1 ppm RMS
Vertical ±20 mm + 1 ppm RMS
Initialization time⁴ typically <10 seconds
Initialization reliability⁵ typically >99.9%

HARDWARE

Physical

Dimensions (W×H) 19 cm × 11.2 cm (7.5 in × 4.4 in),
including connectors
Weight 1.35 kg (2.97 lb) with internal battery, internal radio,
standard UHF antenna.
3.71 kg (8.18 lb) entire RTK rover including
batteries, range pole, controller and bracket

Temperature⁶

Operating -40 °C to +65 °C (-40 °F to +149 °F)
Storage -40 °C to +75 °C (-40 °F to +167 °F)

Humidity 100%, condensing

Water/dustproof IP67 dustproof, protected from temporary
immersion to depth of 1 m (3.28 ft)

© 2005–2008, Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. Integrated Surveying, Maxwell, R-Track, Trimble Survey Controller, and VRS are trademarks of Trimble Navigation Limited. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is under license. All other trademarks are the property of their respective owners. PN 022543-079G (07/08)

Shock and vibration Tested and meets the following
environmental standards:
Shock Non-operating: Designed to survive a 2 m (6.6 ft) pole
drop onto concrete. Operating: to 40 G, 10 msec, sawtooth
Vibration MIL-STD-810F, FIG.514.5C-1

Electrical


- Power 11 to 28 V DC external power input with over-voltage protection on Port 1 (7-pin Lemo)
- Rechargeable, removable 7.4 V, 2.4 Ah Lithium-Ion battery in internal battery compartment. Power consumption is <3.1 W, in RTK mode with internal radio. Operating times on internal battery:
 - 450 MHz receive only option 5.3 hours, varies with temperature
 - 450 MHz receive/transmit option 3.5 hours, varies with temperature and wireless data rate
 - GSM/GPRS 3.8 hours, varies with temperature
- Certification Class B Part 15, 22, 24 FCC certification, 850/1900 MHz. Class 10 GSM/GPRS module. CE Mark approval, and C-tick approval

Communications and Data Storage

- 3-wire serial (7-pin Lemo) on Port 1. Full RS-232 serial on Port 2 (Dsub 9 pin)
- Fully Integrated, fully sealed internal 450 MHz receiver/transmitter option:
 - Transmit power: 0.5 W
 - Range⁷: 3–5 km typical / 10 km optimal
- Fully integrated, fully sealed internal GSM/GPRS option⁸
- Fully integrated, fully sealed 2.4 GHz communications port (Bluetooth®)⁸
- External cellphone support for GSM/GPRS/CDPD modems for RTK and VRS operations
- Data storage on 11 MB internal memory: 302 hours of raw observables based on recording data from 6 satellites at 15 second intervals
- 1 Hz, 2 Hz, 5 Hz, and 10 Hz positioning
- CMR+, RTCM 2.1, RTCM 2.3, RTCM 3.0, RTCM 3.1 Input and Output
- 16 NMEA outputs. GSOF and RT17 outputs. Supports BINEX and smoothed carrier

1 The availability of the L5 signal is dependent on the US Government.
2 Accuracy and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, and atmospheric conditions. Always follow recommended survey practices.
3 Depends on WAAS/EGNOS system performance.
4 May be affected by atmospheric conditions, signal multipath, obstructions and satellite geometry.
5 May be affected by atmospheric conditions, signal multipath, and satellite geometry. Initialization reliability is continuously monitored to ensure highest quality.
6 Receiver will operate normally to -40 °C, internal batteries are rated to -20 °C.
7 Varies with terrain and operating conditions.
8 Bluetooth type approvals are country specific.
Contact your local Trimble Authorized Distribution Partner for more information.

Specifications subject to change without notice.

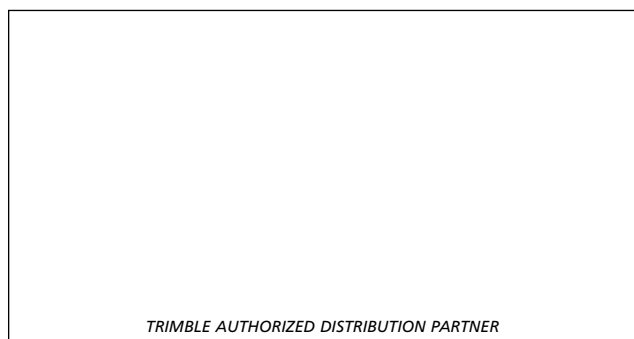

TRIMBLE AUTHORIZED DISTRIBUTION PARTNER

NORTH AMERICA

Trimble Engineering
& Construction Group
5475 Kellenburger Road
Dayton, Ohio 45424-1099 • USA
800-538-7800 (Toll Free)
+1-937-245-5154 Phone
+1-937-233-9441 Fax

EUROPE

Trimble GmbH
Am Prime Parc 11
65479 Raunheim • GERMANY
+49-6142-2100-0 Phone
+49-6142-2100-550 Fax

ASIA-PACIFIC

Trimble Navigation
Singapore Pty Limited
80 Marine Parade Road
#22-06, Parkway Parade
Singapore 449269 • SINGAPORE
+65-6348-2212 Phone
+65-6348-2232 Fax



www.trimble.com